


PN6

EN1092-1 Flange Dimensions

Type 05

Blind / Blanking Flange

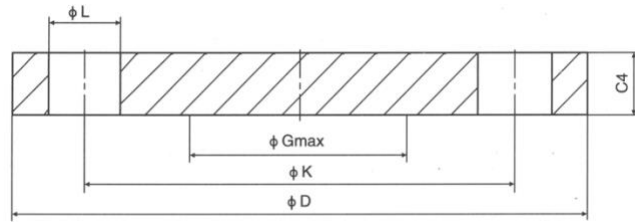

DN	D	C4	K	No.	Suits Bolt	L	G Max. (MM)	KG
10	75	12	50	4	M10	11	-	0.38
15	80	12	55	4	M10	11	-	0.43
20	90	14	65	4	M10	11	-	0.45
25	100	14	75	4	M10	11	-	0.82
32	120	14	90	4	M12	14	-	1.18
40	130	14	100	4	M12	14	-	1.39
50	140	14	110	4	M12	14	-	1.62
65	160	14	130	4	M12	14	55	2.14
80	190	16	150	4	M16	18	70	3.43
100	210	16	170	4	M16	18	90	4.22
125	240	18	200	8	M16	18	115	6.1
150	265	18	225	8	M16	18	140	7.51
200	320	20	280	8	M16	18	190	12.3
250	375	22	335	12	M16	18	235	18.5
300	440	22	395	12	M20	22	285	25.5
350	490	22	445	12	M20	22	330	31.8
400	540	22	495	16	M20	22	380	38.5
450	595	24	550	16	M20	22	425	51.2
500	645	24	600	20	M20	22	475	60.1
600	755	30	705	20	M24	26	575	103.0
700	860	40	810	24	M24	26	670	178.0
800	975	44	920	24	M27	30	770	252.0
900	1075	48	1020	24	M27	30	860	336.0
1000	1175	52	1120	28	M27	30	960	435.0
1200	1405	60	1340	32	M30	33	1160	717.0
1400	1630	68	1560	36	M33	36	1346	1094.0
1600	1830	76	1760	40	M33	36	1546	1545.0
1800	2045	84	1970	44	M36	39	1746	2131.0
2000	2265	92	2180	48	M39	42	1950	2862.0

Disclaimer: The information contained in this data sheet is provided for general guidance only and is not intended for use in critical applications. While every effort has been made to ensure accuracy, Integraflow accepts no responsibility for any errors or omissions. Users should verify all data independently and Integraflow shall not be held liable for any loss or damage resulting from reliance on this information.